


ONE OF THE LEADING SOLUTIONS IN THE SEGMENT



Specifications


Power capacity: 5040Wh
AC230V rated output: 5000W
AC230V Max output: 7000W
Battery Type: LiFeP04
Cycles: 4000>70%
BMS Integrated
MPPT Integrated, 2,100W Max
UPS function
Pure Sine Wave

Dimension:
85.25x51.2x50.02 cm
Weight:
68.3 kg
IP54 Rated
Integrated LCD display

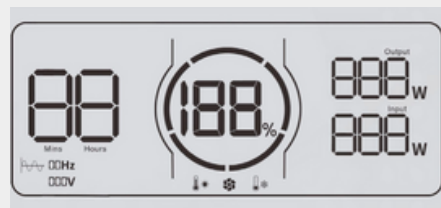

AC Output ON/OFF Switch
 Slow charge option: 1,250W
 Fast charge option: 2,500W
 AC Charging Input
 PV Input (Anderson)
 Overload Protection (AC IN/OUT)
 Port*2 16A Max AC Output
 Port*1 32A Max AC Output
 (Industrial Socket)
 USB-A: 5V/3A;9V/1.8A;12V/1.5A (18W MAX)
 USB-C: 5V/3A;7V/2.4A;9V/1.8A;12V/1.5A

MAX 2,100W Solar Input

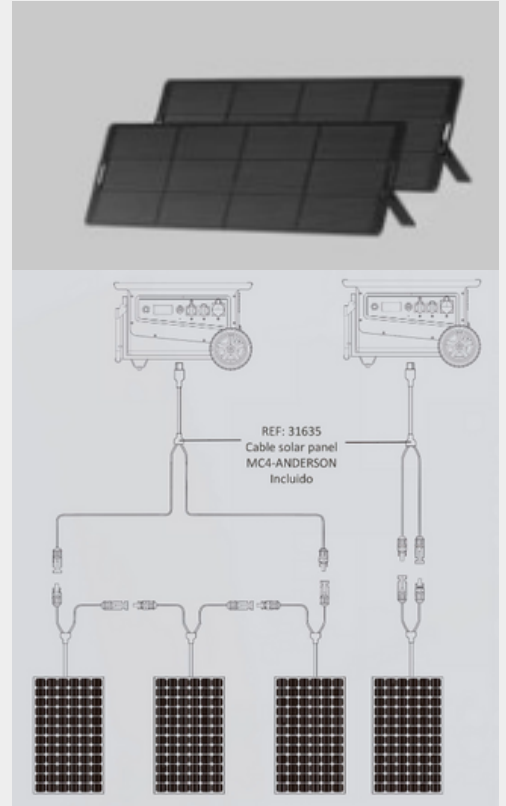

Key Factors



Extremely
portable design



Comfort
big wheels



Protection
IP54



Hybrid Backup
via gasoline generator



5.04 - 45.36 kWh
expandible capacity